

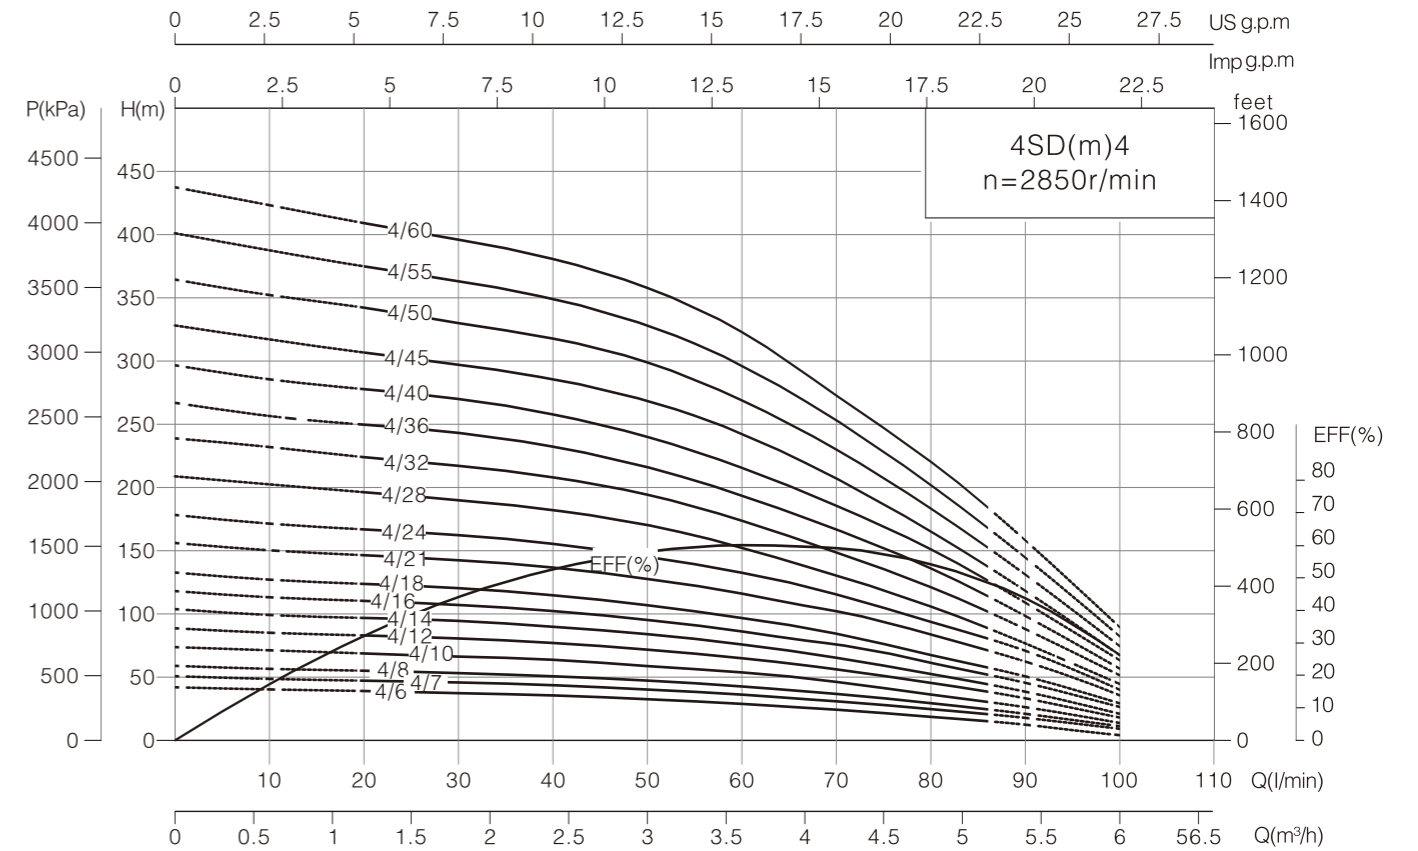
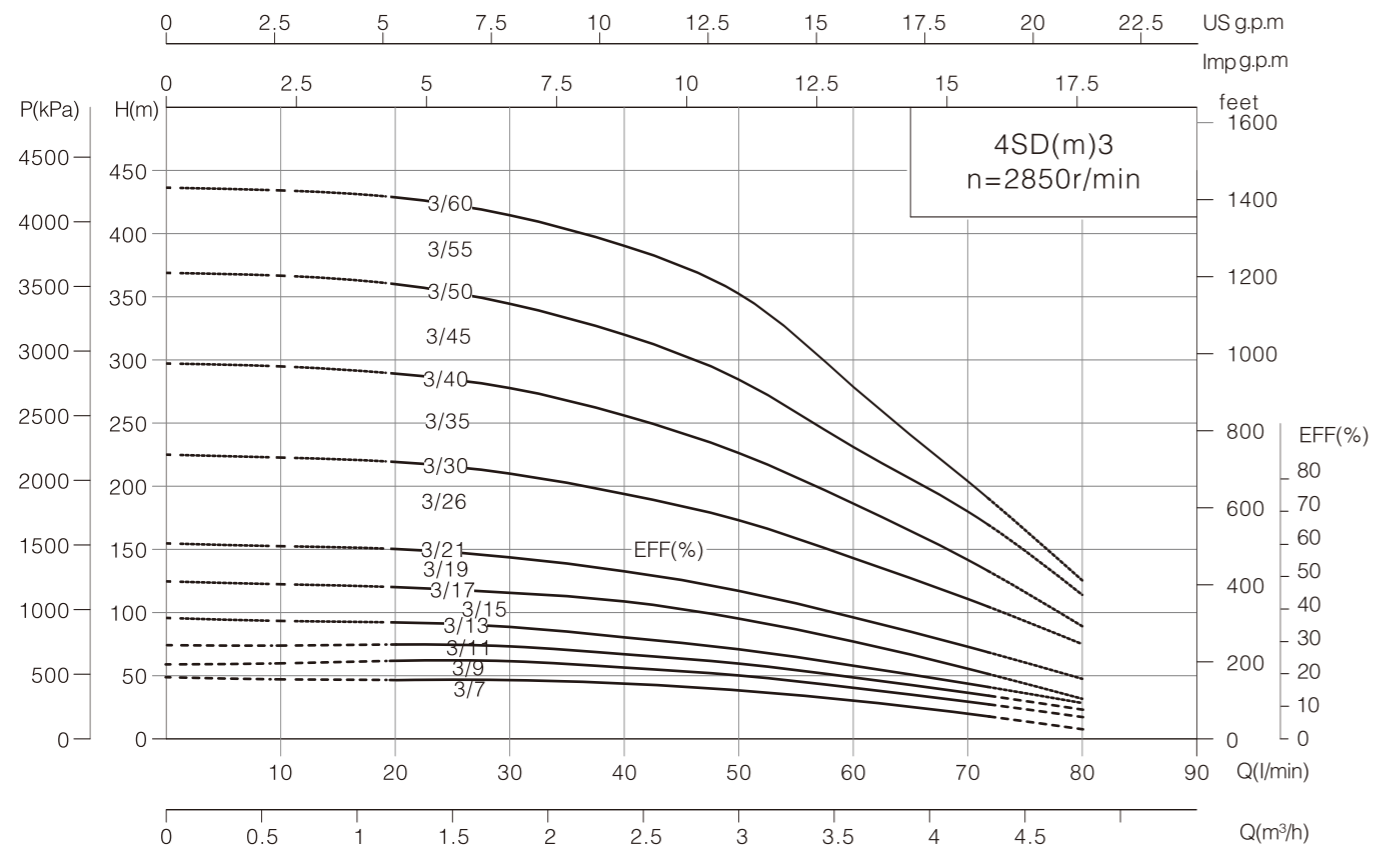


Model		Power		Flow range														Head range (m)	Outlet (inch)
1phase	3phase	kW	HP	m³/h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3	3.3			
220V	380V			l/min	0	5	10	15	20	25	30	35	40	45	50	55			
4SDm2/8	-	0.37	0.5	58	56	55	54	52	50	46	43	38	34	27	21	55~22			
4SDm2/11	-	0.55	0.75	82	80	79	77	74	71	67	62	56	49	41	32	77~34			
4SDm2/14	4SD2/14	0.75	1	102	100	99	97	93	89	84	82	70	62	51	41	99~43			
4SDm2/16	4SD2/16	0.75	1	117	114	113	111	106	102	96	94	80	71	58	47	113~49			
4SDm2/19	4SD2/19	1.1	1.5	140	137	135	133	127	122	115	107	98	86	71	57	135~60			
4SDm2/22	4SD2/22	1.1	1.5	162	159	156	154	147	141	133	124	113	100	82	66	156~69			
4SDm2/25	4SD2/25	1.5	2	184	180	178	174	169	162	152	142	128	114	96	78	178~81			
4SDm2/28	4SD2/28	1.5	2	206	202	199	195	189	181	170	159	143	128	108	87	199~91			
4SDm2/33	4SD2/33	2.2	3	246	241	238	233	226	216	204	191	174	153	130	106	238~110			
4SDm2/38	4SD2/38	2.2	3	283	278	274	268	260	249	235	220	200	176	150	122	274~127			
-	4SD2/44	3	4	320	317	311	304	295	284	269	250	225	198	165	132	311~137			
-	4SD2/50	3	4	364	360	353	345	335	323	306	284	256	225	188	150	353~156			
-	4SD2/55	4	5.5	410	403	396	386	376	361	342	318	289	252	206	165	396~175			
-	4SD2/62	4	5.5	454	446	438	427	416	400	379	352	320	279	228	183	438~190			

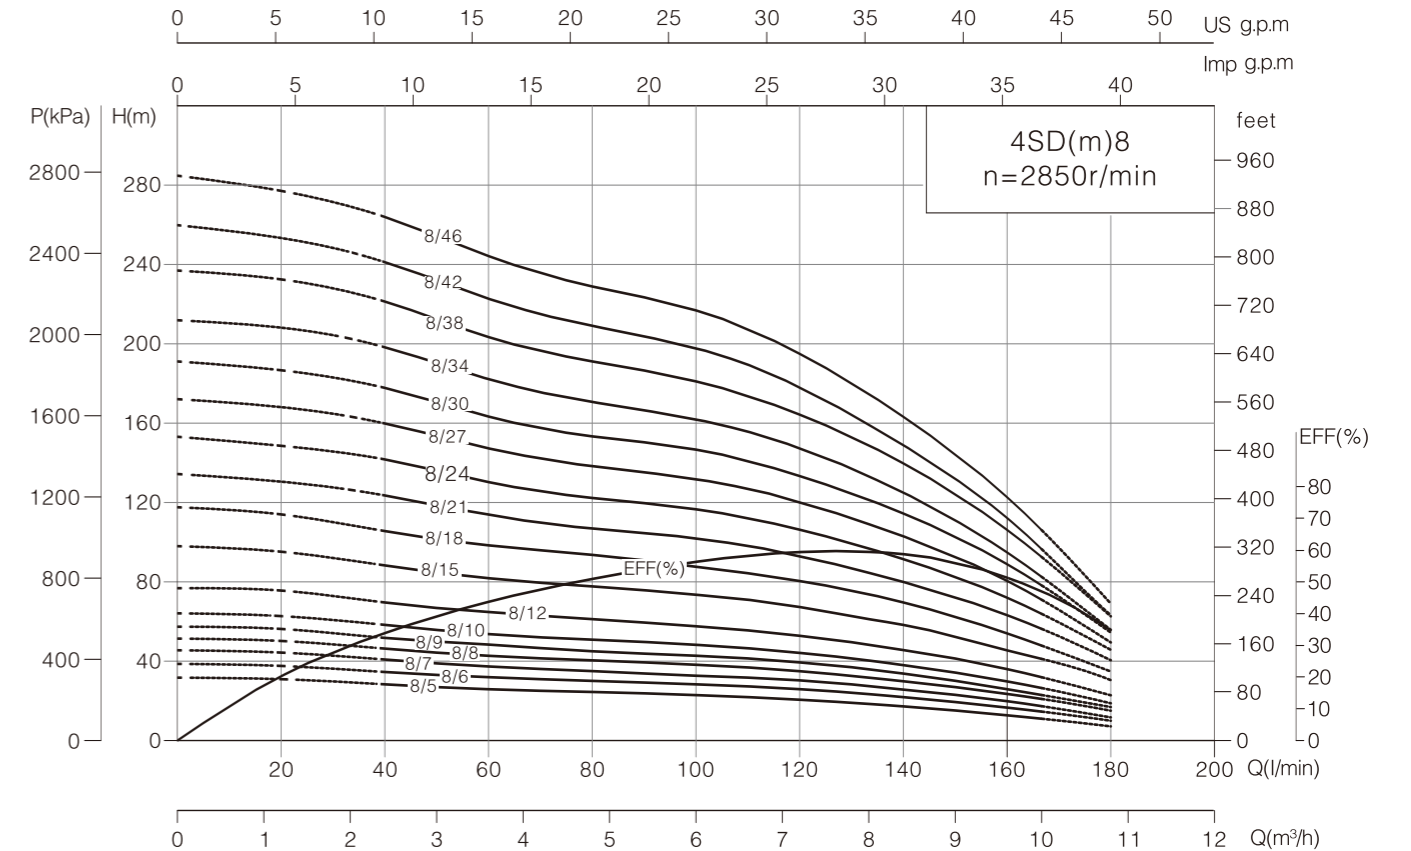



Model		Power		Flow range										Head range (m)	Outlet (inch)				
1phase	3phase	kW	HP	m³/h	H(m)														
220V	380V				0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	0	10	20	30	40	50
4SDm3/7	-	0.37	0.5	49	48	47	44	40	35	28	23	12	47~25	1.25"					
4SDm3/9	-	0.55	0.75	65	64	63	60	55	48	40	30	19	63~35						
4SDm3/11	4SD3/11	0.75	1	81	79	78	75	68	60	49	37	24	78~43						
4SDm3/13	4SD3/13	0.75	1	96	93	92	89	80	71	58	44	28	92~51						
4SDm3/15	4SD3/15	1.1	1.5	110	108	106	102	96	84	68	49	28	106~59						
4SDm3/17	4SD3/17	1.1	1.5	125	122	120	116	109	95	77	56	32	120~67						
4SDm3/19	4SD3/19	1.5	2	140	138	136	130	120	106	87	66	43	136~77						
4SDm3/21	4SD3/21	1.5	2	155	153	150	144	133	117	96	73	48	150~85						
4SDm3/26	4SD3/26	2.2	3	195	193	190	182	168	150	124	96	65	190~111						
4SDm3/30	4SD3/30	2.2	3	225	223	219	210	194	173	143	111	75	219~127						
-	4SD3/35	3	4	260	258	253	243	224	198	163	124	78	253~144						
-	4SD3/40	3	4	297	295	289	278	256	226	186	142	89	289~165						
-	4SD3/45	4	5.5	332	330	324	310	288	256	208	162	107	324~185						
-	4SD3/50	4	5.5	369	367	360	344	320	284	231	180	114	360~206						
-	4SD3/55	5.5	7.5	400	398	393	380	355	323	250	187	115	393~219						
-	4SD3/60	5.5	7.5	436	434	429	415	387	352	273	204	125	429~241						

Model		Power		Flow range										Head range (m)	Outlet (inch)								
1phase	3phase	kW	HP	m³/h	H(m)																		
220V	380V				0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	5.4	6	0	10	20	30	40	50	60	70
4SDm4/6	-	0.37	0.5	42	40	39	37	35	32	29	24	19	12	4	39~15	1.25"							
4SDm4/7	-	0.55	0.75	50	48	47	46	44	40	36	31	25	18	9	47~20								
4SDm4/8	4SD4/8	0.75	1	59	57	55	53	51	47	43	37	29	21	11	55~24								
4SDm4/10	4SD4/10	0.75	1	74	71	69	66	64	59	54	46	36	26	14	69~30								
4SDm4/12	4SD4/12	1.1	1.5	89	85	83	81	77	72	65	56	45	33	18	83~38								
4SDm4/14	4SD4/14	1.1	1.5	104	99	97	95	90	84	76	65	53	39	21	97~43								
4SDm4/16	4SD4/16	1.5	2	118	113	110	107	102	95	86	75	60	45	26	110~51								
4SDm4/18	4SD4/18	1.5	2	133	127	124	120	115	107	97	84	68	51	29	124~57								
4SDm4/21	4SD4/21	2.2	3	156	150	146	142	136	127	116	101	82	62	35	146~70								
4SDm4/24	4SD4/24	2.2	3	178	171	167	162	155	145	133	115	94	71	40	167~79								
-	4SD4/28	3	4	209	203	196	190	182	170	152	130	106	77	45	196~87								
-	4SD4/32	3	4	239	232	224	217	208	194	174	149	121	88	51	224~100								
-	4SD4/36	4	5.5	267	257	250	243	232	216	194	167	136	98	57	250~112								
-	4SD4/40	4	5.5	297	286	278	270	258	240	216	186	151	109	63	278~124								
-	4SD4/45	5.5	7.5	328	317	308	297	286	269	242	207	165	118	67	308~134								
-	4SD4/50	5.5	7.5	364	352	342	330	318	299	269	230	183	131	74	342~149								
-	4SD4/55	7.5	10	401	388	375	363	349	328	296	250	202	145	82	375~164								
-	4SD4/60	7.5	10	437	423	409	396	381	358	323	273	220	158	89	409~180								

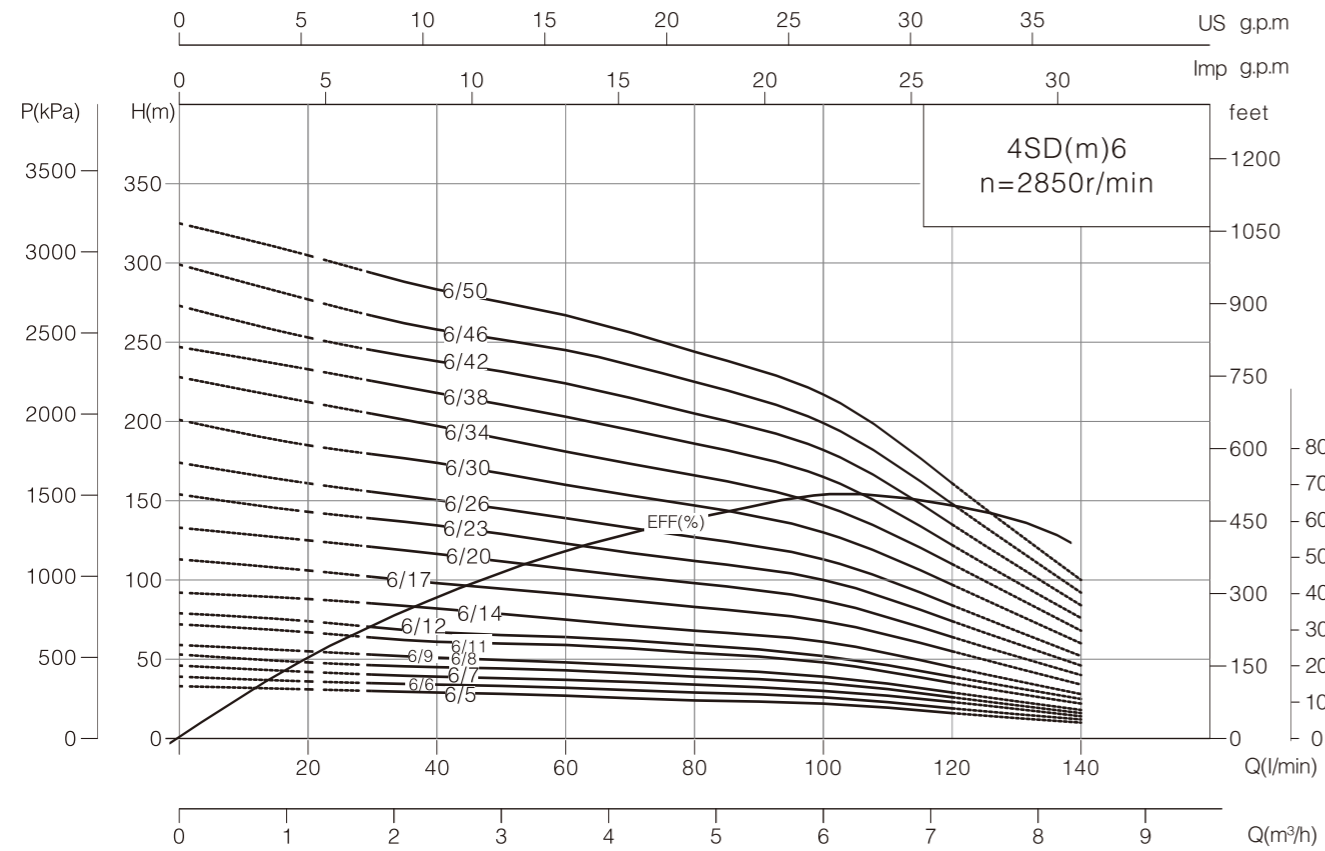

Model		Power		Flow range								Head range (m)	Outlet (inch)	
1phase 220V	3phase 380V	kW	HP	m³/h	0	1.2	2.4	3.6	4.8	6	7.2			8.4
4SDm6/5	-	0.37	0.5	H(m)	33	31	29	27	24	22	16	10	30~16	1.5"
4SDm6/6	-	0.55	0.75		39	36	34	32	29	26	19	12	35~19	
4SDm6/7	4SD6/7	0.75	1		46	42	39	37	34	30	23	14	40~23	
4SDm6/8	4SD6/8	0.75	1		53	48	45	43	39	35	26	16	46~26	
4SDm6/9	4SD6/9	1.1	1.5		59	55	51	48	44	39	29	18	53~29	
4SDm6/11	4SD6/11	1.1	1.5		72	67	61	59	54	48	35	22	64~35	
4SDm6/12	4SD6/12	1.5	2		79	74	67	64	59	52	39	24	70~39	
4SDm6/14	4SD6/14	1.5	2		92	86	78	75	68	61	45	28	85~45	
4SDm6/17	4SD6/17	2.2	3		113	106	98	91	83	74	55	34	102~55	
4SDm6/30	4SD6/20	2.2	3		133	125	113	107	98	87	64	40	121~64	
-	4SD6/23	3	4		154	142	132	123	112	100	74	46	139~74	
-	4SD6/26	3	4		174	161	150	139	127	113	84	52	156~84	
-	4SD6/30	4	5.5		201	185	172	160	147	130	97	60	179~97	
-	4SD6/34	4	5.5		228	210	192	181	166	147	110	68	205~110	
-	4SD6/38	5.5	7.5		247	229	220	203	186	165	122	76	226~122	
-	4SD6/42	5.5	7.5		273	253	238	224	205	182	135	84	245~135	
-	4SD6/46	7.5	10	299	280	260	245	225	199	148	92	267~148		
-	4SD6/50	7.5	10	325	303	284	267	244	217	161	100	294~161		

Model		Power		Flow range										Head range (m)	Outlet (inch)	
1phase 220V	3phase 380V	kW	HP	m³/h	0	1.2	2.4	3.6	4.8	6	7.2	8.4	9.6			10.8
4SDm8/5	-	0.55	0.75	H(m)	32	31	28	26	25	23	21	17	13	7	28~11	2"
4SDm8/6	4SD8/6	0.75	1		39	38	35	32	30	28	26	22	17	10	35~15	
4SDm8/7	4SD8/7	0.75	1		46	44	41	37	35	33	30	26	20	12	41~17	
4SDm8/8	4SD8/8	1.1	1.5		51	50	46	43	40	38	35	30	23	15	46~21	
4SDm8/9	4SD8/9	1.1	1.5		57	56	52	48	45	43	39	34	26	17	52~23	
4SDm8/10	4SD8/10	1.5	2		64	63	58	54	51	48	44	38	30	19	58~26	
4SDm8/12	4SD8/12	1.5	2		77	76	70	65	61	58	53	46	36	23	70~32	
4SDm8/15	4SD8/15	2.2	3		98	95	88	82	78	73	67	58	45	29	88~41	
4SDm8/18	4SD8/18	2.2	3		118	114	106	98	94	88	80	70	54	35	106~48	
-	4SD8/21	3	4		134	130	124	114	107	102	93	80	63	40	124~56	
-	4SD8/24	3	4		153	149	142	130	122	117	106	91	72	46	142~64	
-	4SD8/27	4	5.5		172	168	160	147	138	132	120	103	80	49	160~71	
-	4SD8/30	4	5.5		191	187	178	163	153	147	133	114	89	54	178~78	
-	4SD8/34	5.5	7.5		212	208	198	182	171	162	147	125	95	56	198~83	
-	4SD8/38	5.5	7.5		237	232	221	203	191	181	164	140	106	62	221~93	
-	4SD8/42	7.5	10		260	253	241	223	209	198	178	149	112	63	241~97	
-	4SD8/46	7.5	10	285	277	264	244	229	217	195	163	123	69	264~106		

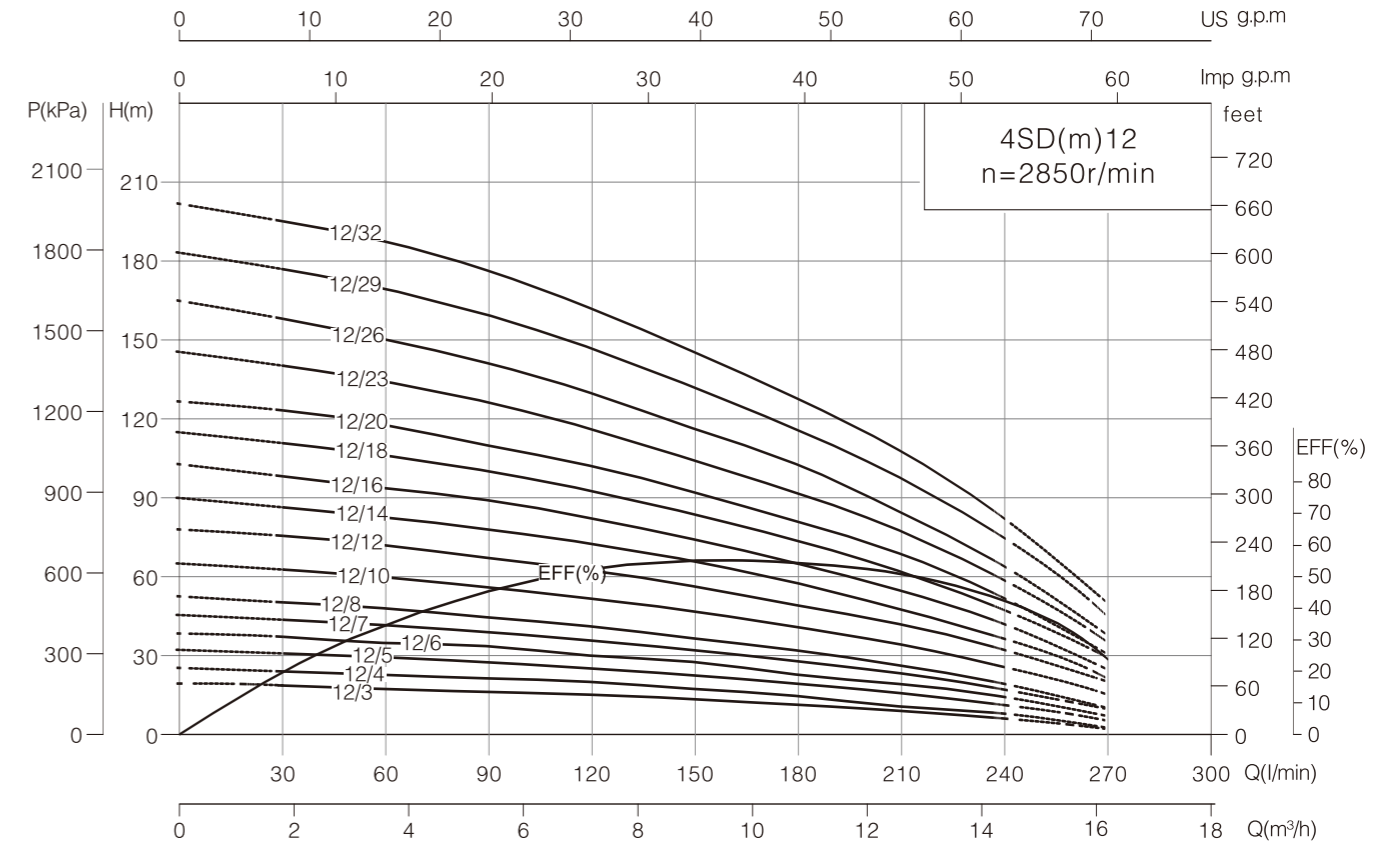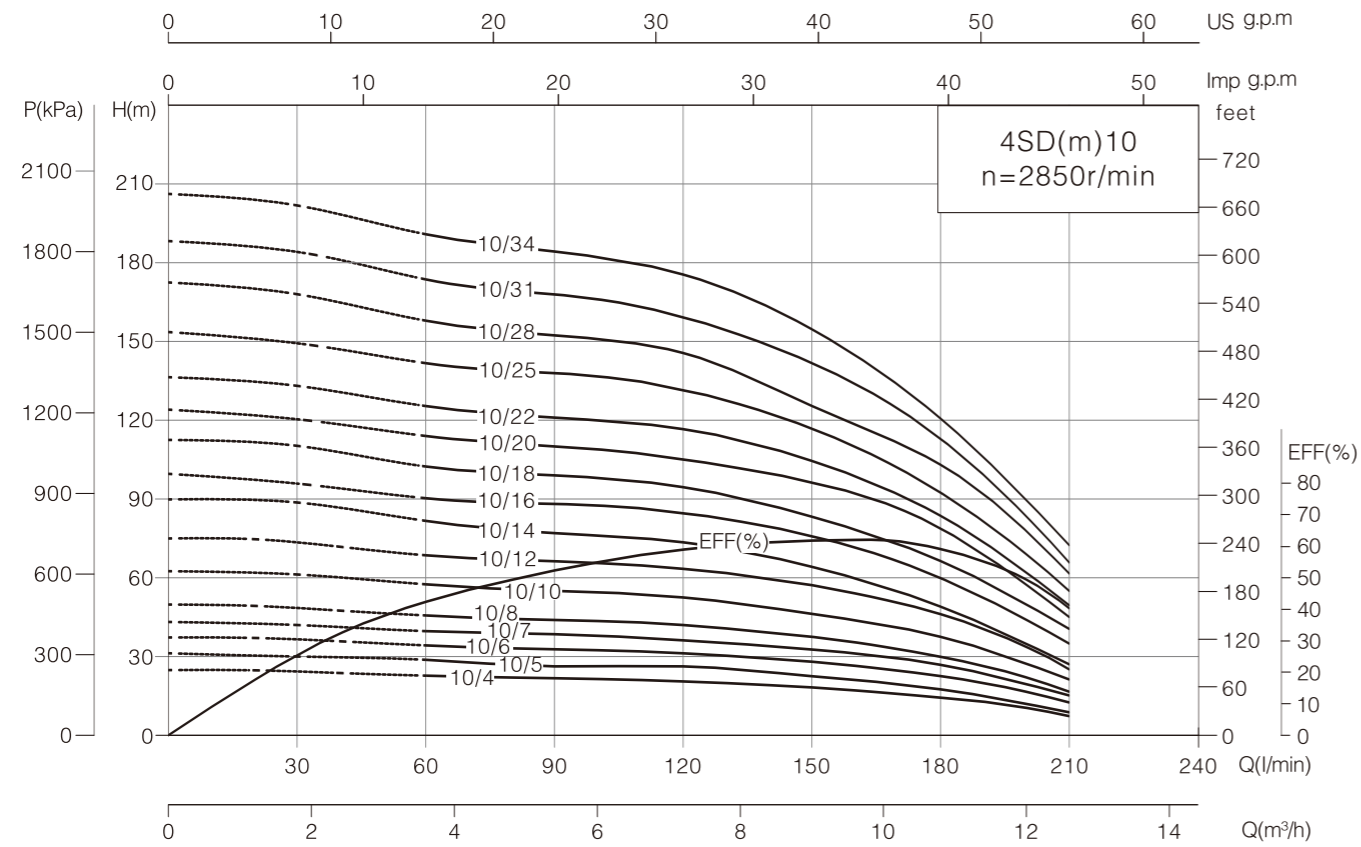

Model		Power		Flow range								Head range (m)	Outlet (inch)	
1phase	3phase	kW	HP	m³/h	0	1.8	3.6	5.4	7.2	9	10.8			12.6
220V	380V			l/min	0	30	60	90	120	150	180	210		
4SDm10/4	4SD10/4	0.75	1	H(m)	25	24	23	22	21	18	14	7	23~7	2"
4SDm10/5	4SD10/5	0.75	1		31	30	29	27	26	23	18	9	29~9	
4SDm10/6	4SD10/6	1.1	1.5		37	36	34	33	31	28	23	13	34~13	
4SDm10/7	4SD10/7	1.1	1.5		43	42	40	39	36	33	27	15	40~15	
4SDm10/8	4SD10/8	1.5	2		50	49	46	44	42	37	30	17	47~17	
4SDm10/10	4SD10/10	1.5	2		63	61	58	55	53	46	38	21	59~21	
4SDm10/12	4SD10/12	2.2	3		77	76	70	66	63	55	42	22	70~22	
4SDm10/14	4SD10/14	2.2	3		90	89	82	77	74	64	49	26	84~26	
-	4SD10/16	3	4		100	98	91	88	84	74	59	36	92~36	
-	4SD10/18	3	4		113	110	102	99	95	83	66	41	105~41	
-	4SD10/20	4	5.5		124	121	114	110	106	95	76	45	116~45	
-	4SD10/22	4	5.5		136	133	125	121	117	105	84	50	128~50	
-	4SD10/25	5.5	7.5		154	150	141	136	130	116	92	55	144~55	
-	4SD10/28	5.5	7.5		172	168	158	152	146	125	103	62	161~62	
-	4SD10/31	7.5	10	188	184	174	168	160	141	110	66	177~66		
-	4SD10/34	7.5	10	206	202	191	184	175	155	121	72	194~72		

Model		Power		Flow range												Head range (m)	Outlet (inch)
1phase	3phase	kW	HP	m³/h	0	1.8	3.6	5.4	7.2	9	10.8	12.6	14.4	16.2			
220V	380V			l/min	0	30	60	90	120	150	180	210	240	270			
4SDm12/3	4SD12/3	0.75	1	H(m)	19	18	17	16	15	13	11	8	6	2	18~7	2"	
4SDm12/4	4SD12/4	0.75	1		25	24	23	21	20	17	15	11	8	3	23~9		
4SDm12/5	4SD12/5	1.1	1.5		32	31	29	28	25	23	19	16	12	6	30~12		
4SDm12/6	4SD12/6	1.1	1.5		38	37	35	34	30	28	23	19	14	7	35~16		
4SDm12/7	4SD12/7	1.5	2		46	44	42	39	36	32	28	23	17	9	42~19		
4SDm12/8	4SD12/8	1.5	2		53	50	48	45	41	37	32	26	19	10	49~21		
4SDm12/10	4SD12/10	2.2	3		65	63	60	56	52	47	41	35	27	17	60~28		
4SDm12/12	4SD12/12	2.2	3		78	76	72	67	62	56	49	42	32	20	73~35		
-	4SD12/14	3	4		90	86	82	78	72	65	57	48	37	22	83~39		
-	4SD12/16	3	4		103	98	94	89	82	74	65	55	42	25	95~45		
-	4SD12/18	4	5.5		114	111	106	99	92	83	73	62	47	28	107~51		
-	4SD12/20	4	5.5		127	123	118	110	102	92	81	69	52	31	119~56		
-	4SD12/23	5.5	7.5		146	140	133	125	115	103	91	75	57	34	136~63		
-	4SD12/26	5.5	7.5		165	158	150	141	130	116	103	85	64	38	152~69		
-	4SD12/29	7.5	10	183	177	170	160	147	132	116	98	75	46	171~80			
-	4SD12/32	7.5	10	202	195	188	177	162	146	128	108	83	51	189~88			