



Model	Power		Outlet (inch)	Flow range											
	kW	HP		m³/h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	
1phase				l/min	0	5	10	15	20	25	30	35	40	45	
220V				H(m)											
3SDm 2/7	0.18	0.25	1		30	30	29	29	27	25	23	20	16	11	
3SDm 2/10	0.25	0.33			43	42	42	41	39	36	33	28	23	16	
3SDm 2/14	0.37	0.5			60	59	59	57	54	51	46	40	32	23	
3SDm 2/20	0.55	0.75			86	85	84	82	78	73	66	57	46	32	
3SDm 2/27	0.75	1			115	114	113	110	105	98	88	76	62	44	
3SDm 2/33	1.1	1.5			142	141	139	136	130	120	109	93	77	53	

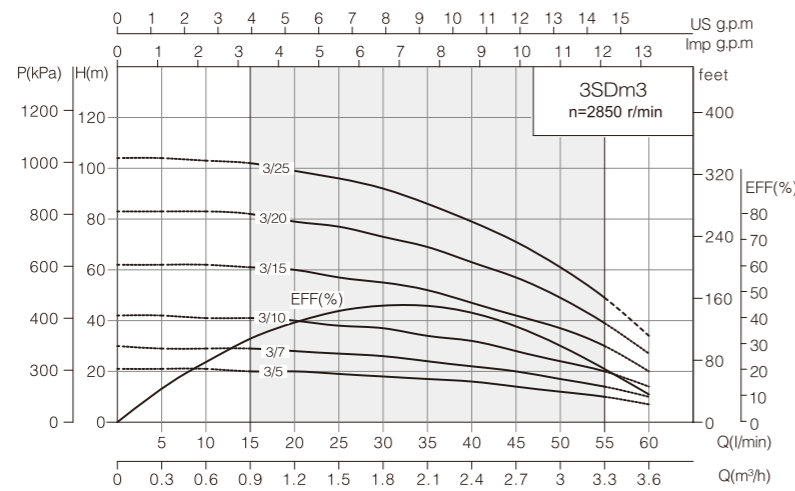

Model	Power		Outlet (inch)	Flow range													
	kW	HP		m³/h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3	3.3	3.6
1phase				l/min	0	5	10	15	20	25	30	35	40	45	50	55	60
220V				H(m)													
3SDm 3/5	0.18	0.25	1		21	21	21	20	20	19	18	17	16	14	12	10	7
3SDm 3/7	0.25	0.33			30	29	29	29	28	27	26	24	22	20	17	14	10
3SDm 3/10	0.37	0.5			41	42	41	41	40	38	37	34	32	28	24	20	14
3SDm 3/15	0.55	0.75			62	62	62	61	60	57	55	52	47	42	37	30	20
3SDm 3/20	0.75	1			83	83	83	82	79	77	73	69	63	57	49	39	27
3SDm 3/25	1.1	1.5			104	104	103	102	99	96	92	86	79	71	61	49	34

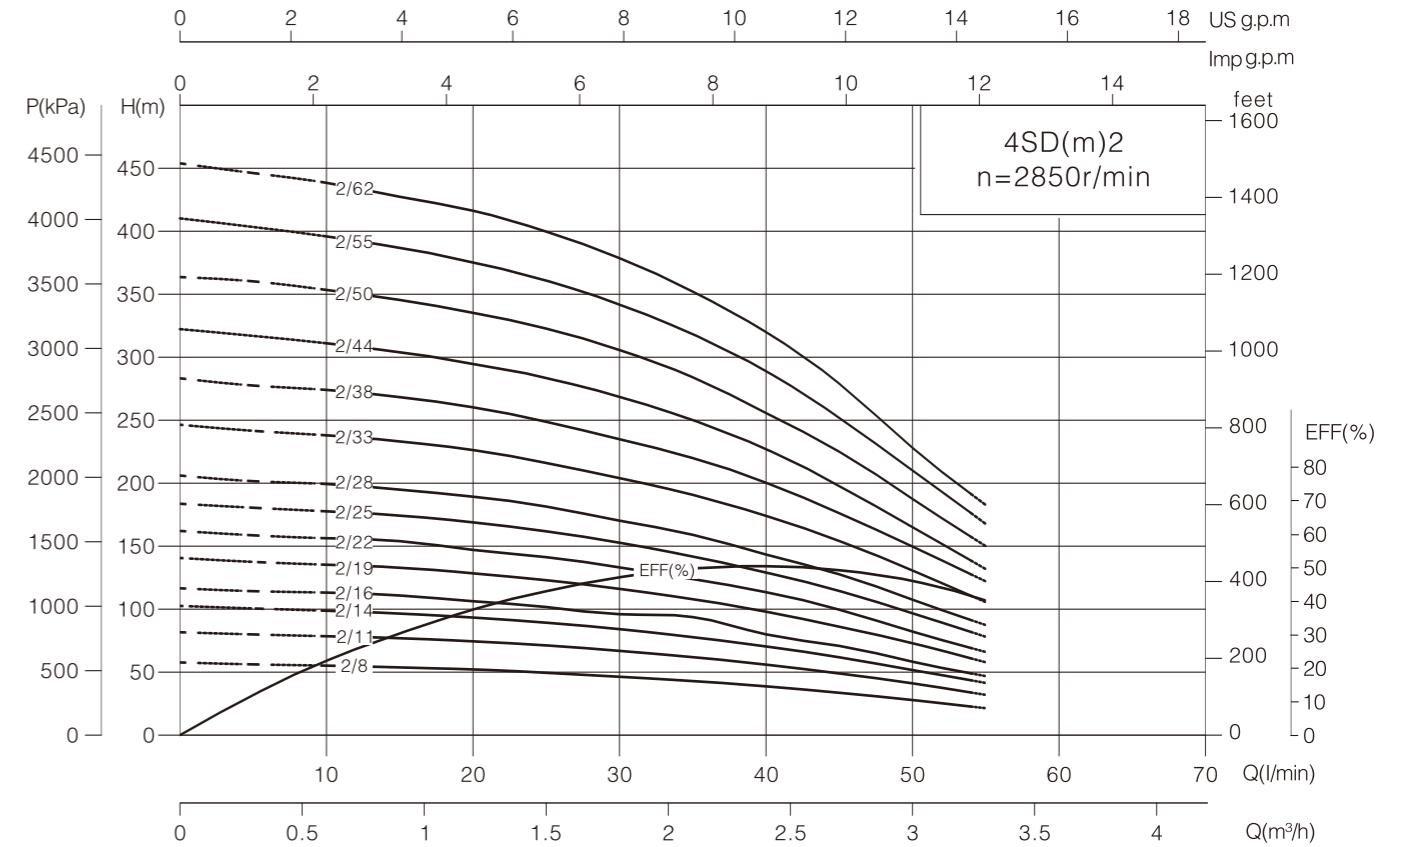

Model	Power		Outlet (inch)	Flow range														Head range (m)
	1phase 220V	3phase 380V		kW	HP	m³/h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3	
4SDm2/8	-	-	0.37	0.5	58	56	55	54	52	50	46	43	38	34	27	21	55~22	
4SDm2/11	-	-	0.55	0.75	82	80	79	77	74	71	67	62	56	49	41	32	77~34	
4SDm2/14	4SD2/14	0.75	1	102	100	99	97	93	89	84	82	70	62	51	41	99~43		
4SDm2/16	4SD2/16	0.75	1	117	114	113	111	106	102	96	94	80	71	58	47	113~49		
4SDm2/19	4SD2/19	1.1	1.5	140	137	135	133	127	122	115	107	98	86	71	57	135~60		
4SDm2/22	4SD2/22	1.1	1.5	162	159	156	154	147	141	133	124	113	100	82	66	156~69		
4SDm2/25	4SD2/25	1.5	2	184	180	178	174	169	162	152	142	128	114	96	78	178~81		
4SDm2/28	4SD2/28	1.5	2	206	202	199	195	189	181	170	159	143	128	108	87	199~91		
4SDm2/33	4SD2/33	2.2	3	246	241	238	233	226	216	204	191	174	153	130	106	238~110		
4SDm2/38	4SD2/38	2.2	3	283	278	274	268	260	249	235	220	200	176	150	122	274~127		
-	4SD2/44	3	4	320	317	311	304	295	284	269	250	225	198	165	132	311~137		
-	4SD2/50	3	4	364	360	353	345	335	323	306	284	256	225	188	150	353~156		
-	4SD2/55	4	5.5	410	403	396	386	376	361	342	318	289	252	206	165	396~175		
-	4SD2/62	4	5.5	454	446	438	427	416	400	379	352	320	279	228	183	438~190		